

P/N: 60901-1101

Copyright

© 2016, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: 60901-1101

Release:

Commit: 35207

Language: en-US

Modified: 2016-04-27

Formatted: 2016-04-28

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



General description

The FLIR A310pt Pan & Tilt is an affordable solution for anyone who needs to solve problems that require built in “smartness” such as analysis and alarm functionality. The FLIR A310pt Pan & Tilt has all the necessary features and functions to build distributed single- or multi-camera solutions to cover large areas to monitor such as in coal pile monitoring and sub-station monitoring using standard Ethernet hardware and software protocols.

The FLIR A310pt precision pan/tilt mechanism gives operators accurate pointing control while providing fully programmable scan patterns, radar slew-to-cue, and slew-to-alarm functionality.

Multi-sensor configurations also include a day/night 36x zoom color CCD camera on the same pan/tilt package.

Key features:

- Built-in extensive analysis functionality.
- Extensive alarm functionality, as a function of analysis and more.
- H.264, MPEG-4, and MJPEG streaming.
- Built-in web server.
- 100 Mbps Ethernet (100 m cable, wireless, fiber, etc.).
- Composite video output.
- Precise pan/tilt mechanism.
- Daylight camera.
- IP66 rated.
- IP control: FLIR PT series cameras can be integrated into any existing TCP/IP network and controlled using a personal computer.
- Serial control interface, use Pelco D or Bosch commands over RS-232, RS-422, or RS-485 to remotely control the FLIR A310 pt.
- Multi-camera software: FLIR Sensors Manager allows users to manage and control a FLIR PT series camera in a TCP/IP network.

Imaging and optical data

IR resolution	320 × 240 pixels
Thermal sensitivity/NETD	< 0.05°C @ +30°C (+86°F) / 50 mK
Field of view (FOV)	6° × 4.5°
Minimum focus distance	4 m (13.11 ft.)
Focal length	76 mm (3.0 in.)
Spatial resolution (IFOV)	0.33 mrad
Lens identification	Automatic
F-number	1.3
Image frequency	9 Hz

P/N: 60901-1101

© 2016, FLIR Systems, Inc.

#60901-1101; r. /35207; en-US

Imaging and optical data	
Focus	Automatic or manual (built in motor)
Zoom	1–8× continuous, digital, interpolating zooming on images

Detector data	
Detector type	Focal plane array (FPA), uncooled microbolometer
Spectral range	7.5–13 μm
Detector pitch	25 μm
Detector time constant	Typical 12 ms

Measurement	
Object temperature range	<ul style="list-style-type: none"> –20 to +120°C (–4 to +248°F) 0 to +350°C (+32 to +662°F)
Accuracy	±4°C (±7.2°F) or ±4% of reading

Measurement analysis	
Spotmeter	10
Area	10 boxes with max./min./average/position (7 if FLIR Sensors Manager is used)
Isotherm	1 with above/below/interval
Atmospheric transmission correction	Automatic, based on inputs for distance, atmospheric temperature and relative humidity
Optics transmission correction	Automatic, based on signals from internal sensors
Emissivity correction	Variable from 0.01 to 1.0
Reflected apparent temperature correction	Automatic, based on input of reflected temperature
External optics/windows correction	Automatic, based on input of optics/window transmission and temperature
Measurement corrections	Global and individual object parameters

Alarm	
Alarm functions	6 automatic alarms on any selected measurement function, camera temperature

Set-up	
Color palettes	Color palettes (BW, BW inv, Iron, Rain)
Set-up commands	Date/time, Temperature (°C/°F)

Imaging and optical data (visual camera)	
Field of view (FOV)	57.8° (H) to 1.7° (H)
Focal length	3.4 mm (wide) to 122.4 mm (tele)
F-number	1.6 to 4.5
Focus	Automatic or manual (built in motor)
Optical Zoom	36× continuous
Electronic Zoom	12× continuous, digital, interpolating

P/N: 60901-1101

© 2016, FLIR Systems, Inc.

#60901-1101; r. /35207; en-US

Detector data (visual camera)	
Focal plane array (FPA)	1/4" Exview HAD CCD
Effective pixels	380.000
Technical specification (pan & tilt)	
Azimuth Range	Az velocity 360° continuous, 0.1 to 60°/sec max
Elevation Range	EI velocity ± 45°, 0.1 to 30°/sec. max
Programmable presets	128
Automatic heaters	Clears window from ice. Switched on at +4°C (39°F). Switched off at +15°C (59°F).
Ethernet	
Ethernet	Control, result and image
Ethernet, type	100 Mbps
Ethernet, standard	IEEE 802.3
Ethernet, connector type	RJ-45
Ethernet, communication	
Ethernet, video streaming	Two independent channels for each camera - MPEG-4, H.264, or M-JPEG
Ethernet, protocols	TCP, UDP, SNTP, RTSP, RTP, HTTP, ICMP, IGMP, ftp, SMTP, SMB (CIFS), DHCP, MDNS (Bonjour), uPnP
Composite video	
Video out	Composite video output, PAL compatible
Video, standard	CVBS (ITU-R-BT.470 PAL)
Power system	
Power	24 VAC (21-30 VAC; 24 VAC: 215 VA max. with heater) or 24 VDC (21-30 VDC; 24 VDC: 195 W max. with heater).
Environmental data	
Operating temperature range	-25°C to +50°C (-13°F to +122°F)
Storage temperature range	-40°C to +70°C (-40°F to +158°F)
Humidity (operating and storage)	IEC 60068-2-30/24 h 95% relative humidity +25° C to +40°C (+77°F to +104°F)
EMC	<ul style="list-style-type: none"> EN 61000-6-2 (Immunity) EN 61000-6-3 (Emission) FCC 47 CFR Part 15 Class B (Emission)
Encapsulation	IP 66 (IEC 60529)
Bump	5 g, 11 ms (IEC 60068-2-27)
Vibration	2 g (IEC 60068-2-6)
Physical data	
Weight	18.1 kg (40.0 lb.)
Size (L x W x H)	460 x 467 x 326 mm (18.1 x 18.4 x 12.8 in.)

P/N: 60901-1101


© 2016, FLIR Systems, Inc.

#60901-1101; r. /35207; en-US

Physical data	
Base mounting	
Housing material	Aluminum
Shipping information	
Packaging, type	Cardboard box
List of contents	<ul style="list-style-type: none"> • Pan & tilt with infrared camera including lens and visual camera • FLIR Sensors Manager download card • Lens cap • Printed documentation • Small accessories kit
Packaging, weight	
Packaging, size	671 × 564 × 464 mm (26.4 × 22.2 × 18.3 in.)
EAN-13	7332558007938
UPC-12	845188008291
Country of origin	Sweden

Supplies & accessories:

- T197000; High temp. option +1200°C (+2192°F)
- 4119468; ADAPTER PLATE - PT-SERIES
- 223-0017-00; JOYSTICK ASSY, NEXUS CONSOLE
- 500-0461-00; PEDESTAL MOUNT ASSY - PT-SERIES
- 500-0509-00; POLE ADAPTER - PT-SERIES
- 4124857; POWER SUPPLY ASSY, 24VAC - PT-series
- 500-0460-00; WALL MOUNT ASSY - PT-SERIES
- 324-0010-00; Hard case - PT-SERIES
- 4130235; FLIR Sensors Manager, pro

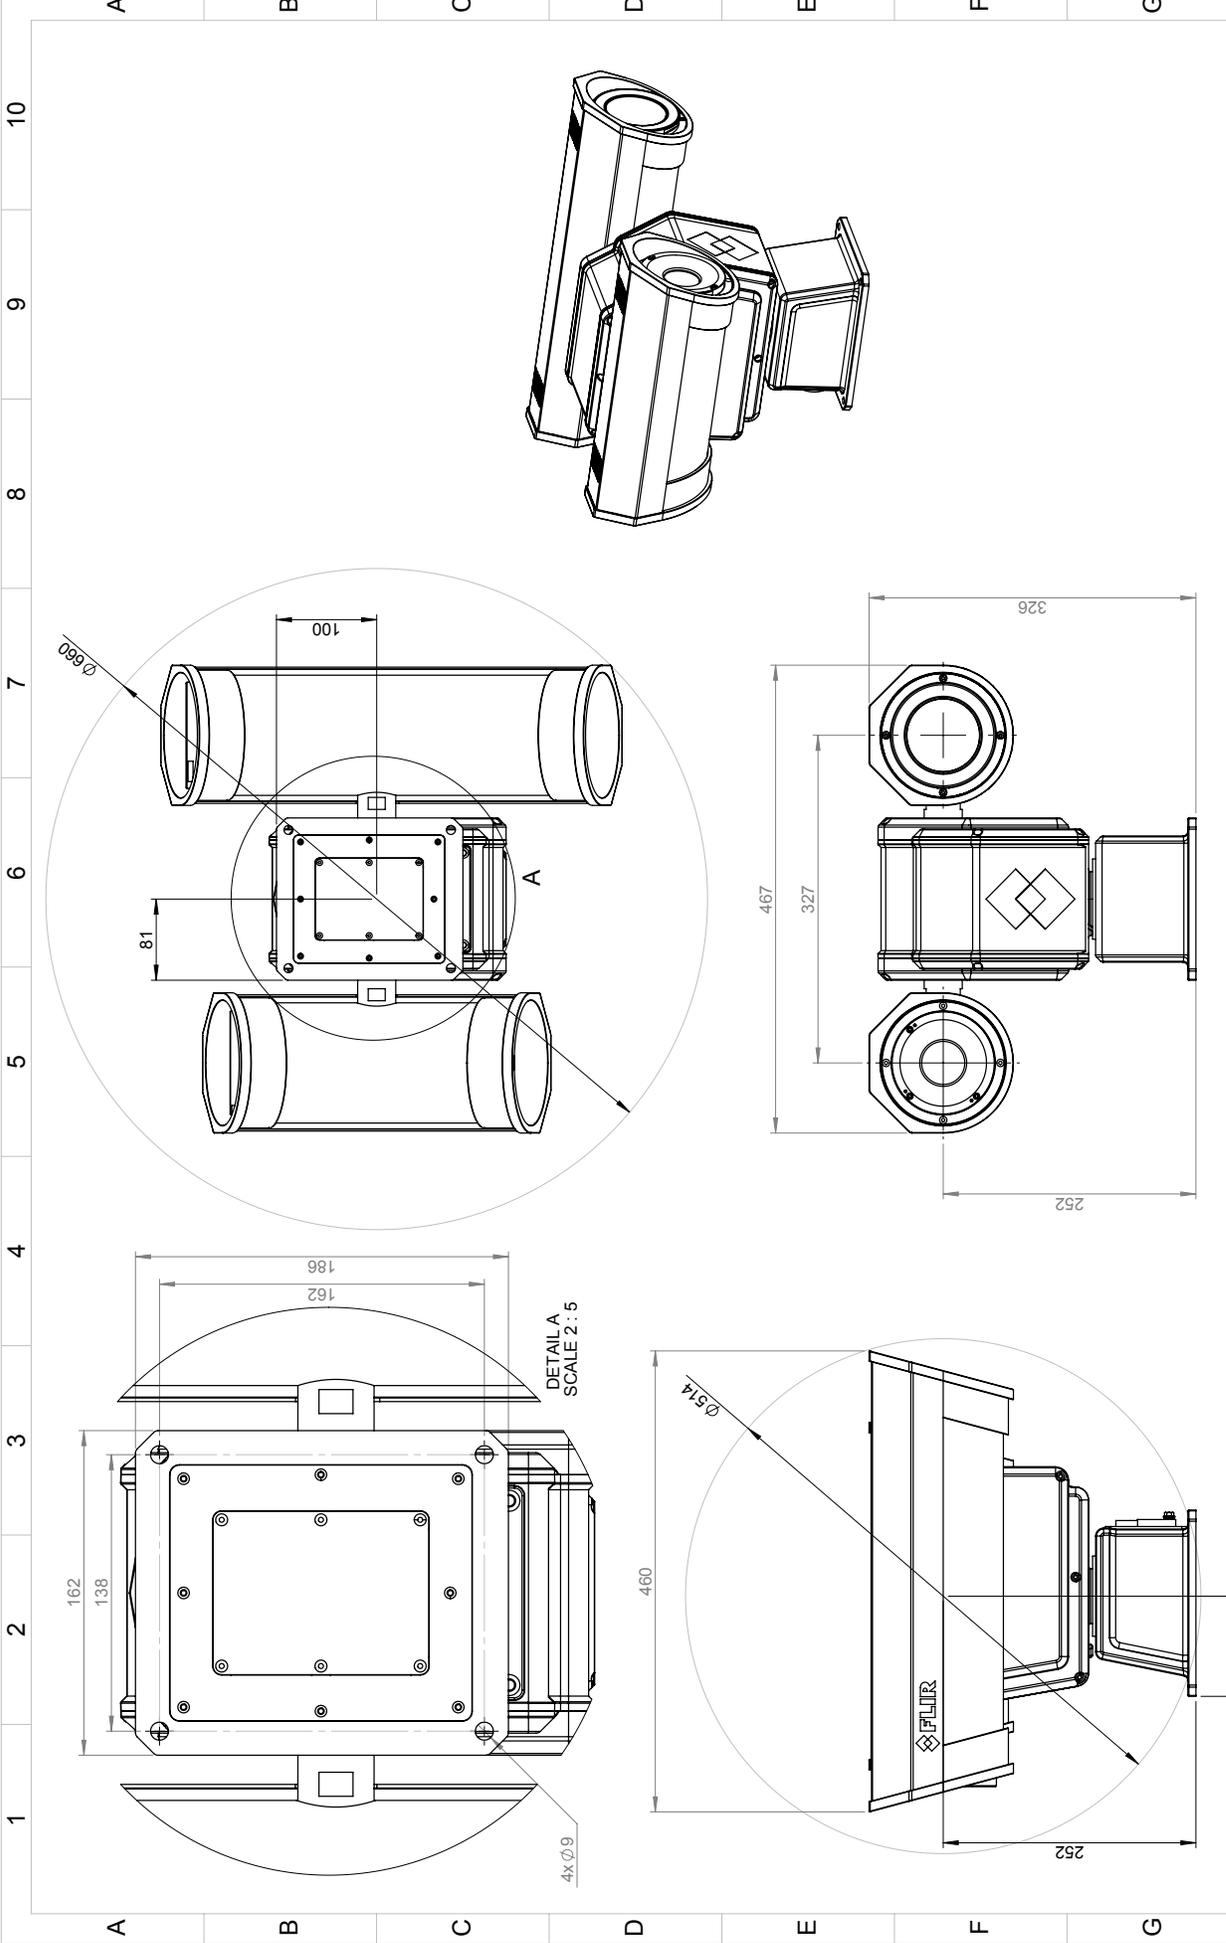






FLIR	Blatt/Sheet 1(1)	Blatt/Sheet A3
Skala/Scale 1:3	ArtNo.	Revisjon/Revision T127400

Konstruktør/Designer H. ÖSTLING	Kontroll/Check ULGU	Material _
Ändrad av/Modified by H. ÖSTLING	Ytbehandling/Roughness Ra - μm	
Där ej annat anges/Unless otherwise stated Genom ISO 2768-mK Utmått ut/Excerpt from ISO 2768-m	Benämning/Denomination DIMENSIONAL DRAWING PT	
0.5-6 0.1 0.1-0.2 0.1-0.2 0.1-0.2 0.1-0.2 0.1-0.2 0.1-0.2 0.1-0.2 0.1-0.2	Hålklarsradier ±0.1 ±0.2 ±0.2 ±0.2 ±0.2 ±0.2 ±0.2 ±0.2 ±0.2 ±0.2	
	Flänsradier ±0.1 ±0.2 ±0.2 ±0.2 ±0.2 ±0.2 ±0.2 ±0.2 ±0.2 ±0.2	
	Kanter brutna ±0.5 ±0.5 ±0.5 ±0.5 ±0.5 ±0.5 ±0.5 ±0.5 ±0.5 ±0.5	
	Edgar broken ±0.8 ±0.8 ±0.8 ±0.8 ±0.8 ±0.8 ±0.8 ±0.8 ±0.8 ±0.8	

FLIR SYSTEMS AB
This document must not be communicated or
copied completely or in part, without our permission.
Any infringement will lead to legal proceedings.

FLIR SYSTEMS AB
Den här handling är ett delat ämne, kopiering i
sin helhet eller delar därav är förbjuden med undantag för
överenskomna återtryck med skriftligt godkännande.







Camera with built-in IR lens f=18 mm (25°)

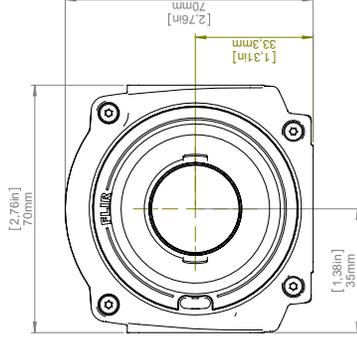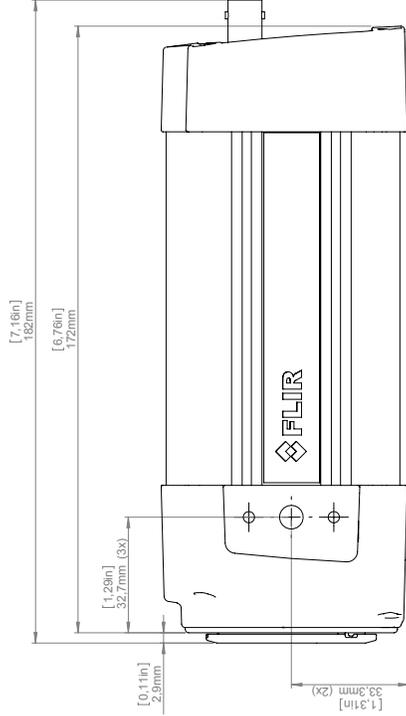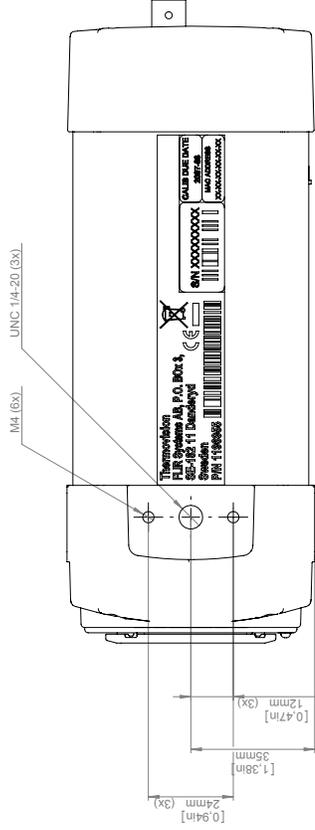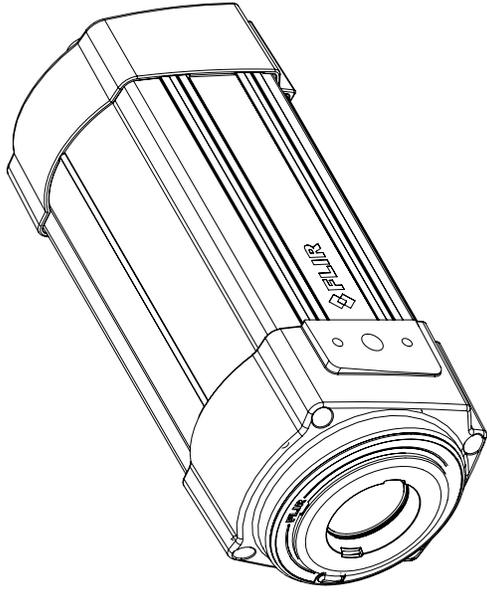

Modified	2012-04-18	Check	CAHA	Drawn by	R&D Thermography	Size	A3
Denominations				Drawings		Scale	1:1
Basic dimensions FLIR A3xx/SC3xx						Sheet	1(6)
						Drawing No.	T-125002
						Size	A




Camera with Lens IR f=4 mm (90°) incl support

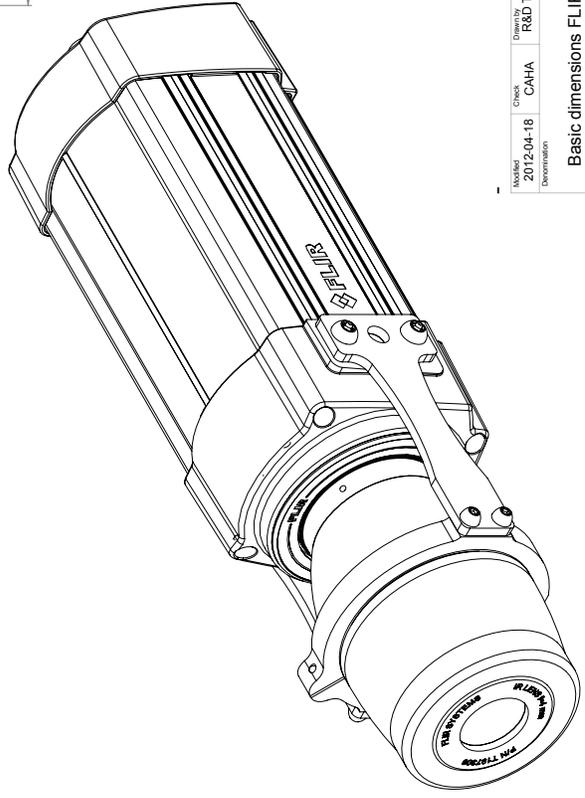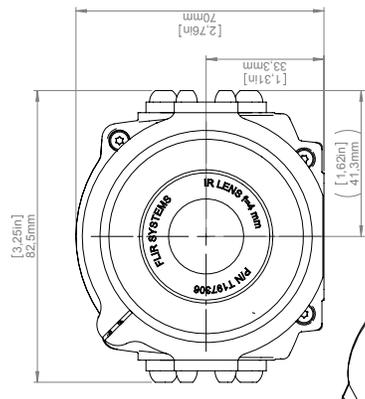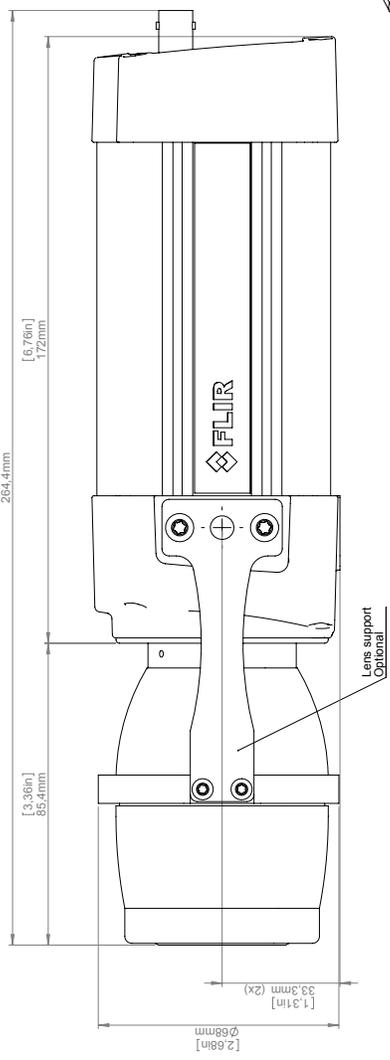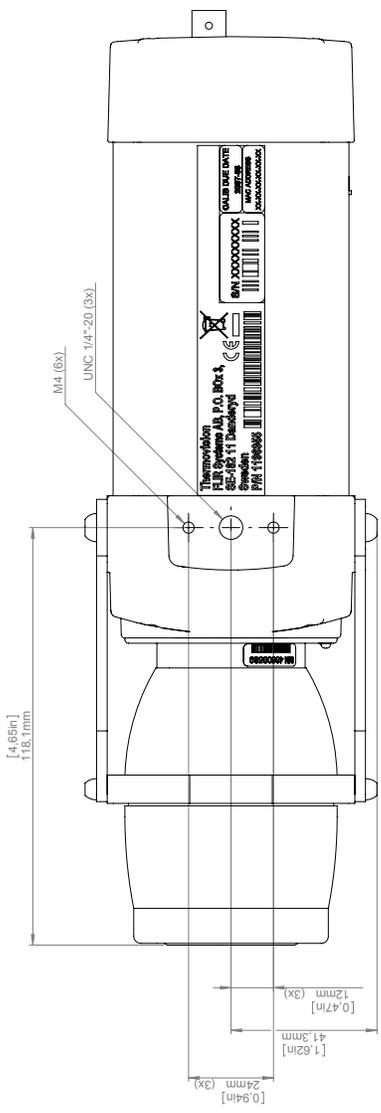







For additional dimensions see page 1

Model	2012-04-18	Check	CAHA	Drawn by	R&D Thermography	Rev	A3
Dimension						Scale	1:1
						Sheet	2(8)
						Drawing No.	T-125002
						Size	A




Basic dimensions FLIR A3xx/SC3xx

Camera with Lens IR f=10 mm (45°)




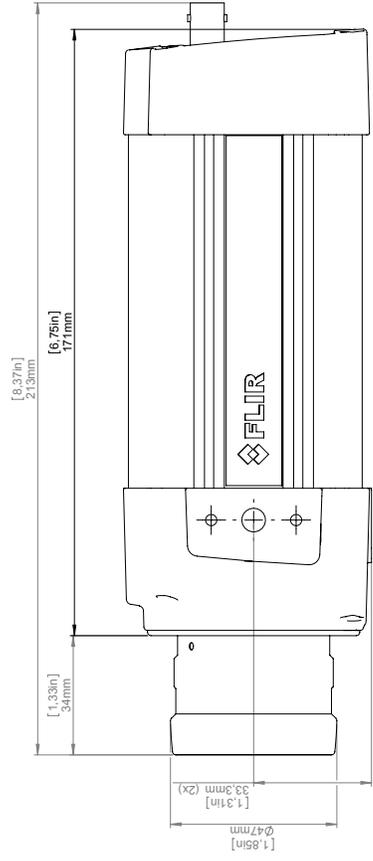
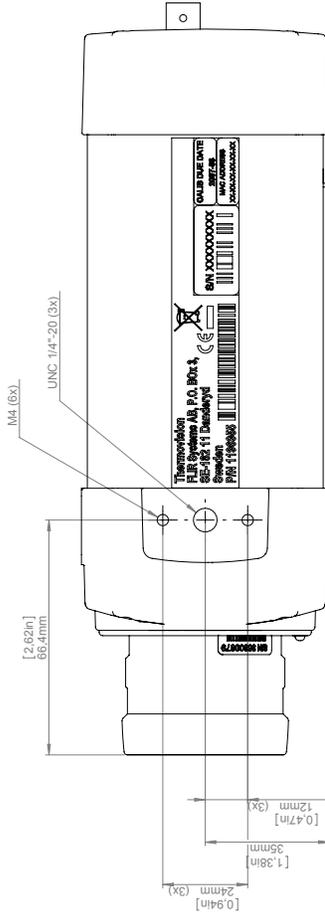
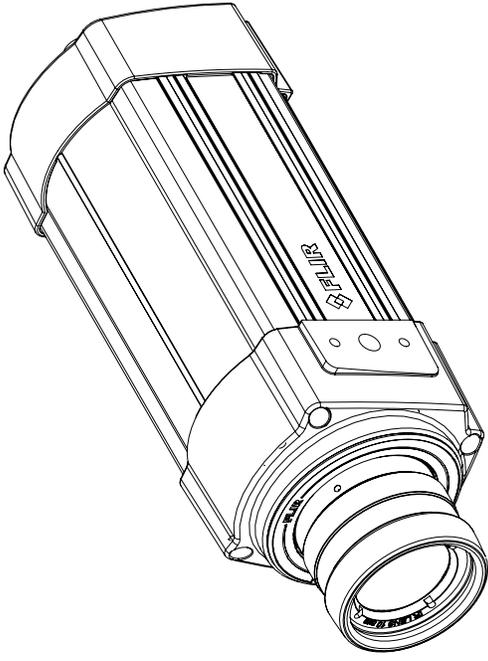


For additional dimensions see page 1

Model	2012-04-18	Check	CAHA	Drawn by	R&D Thermography	Size	A3	
Revision						Scale	1:1	
						Sheet	3(e)	
						Drawing No.	T-125002	
Basic dimensions FLIR A3xx/SC3xx							Sheet	A




Camera with Lens IR f=30 mm (15°)

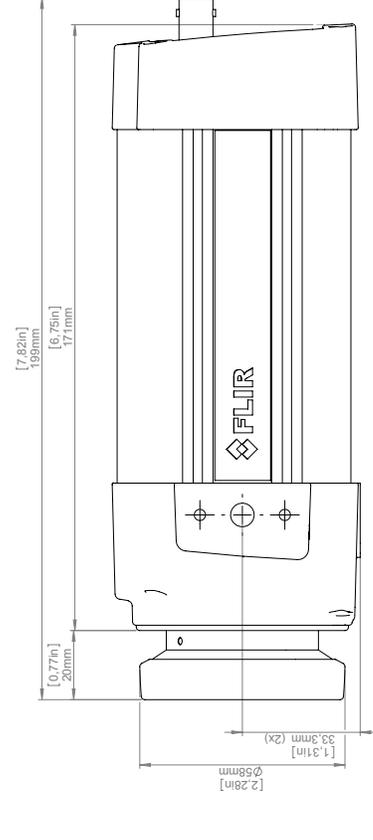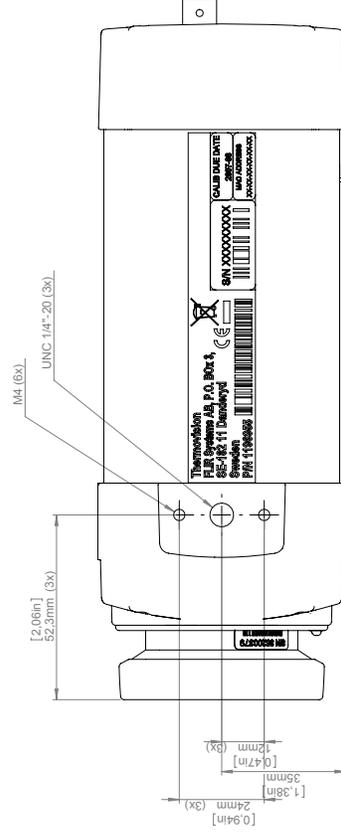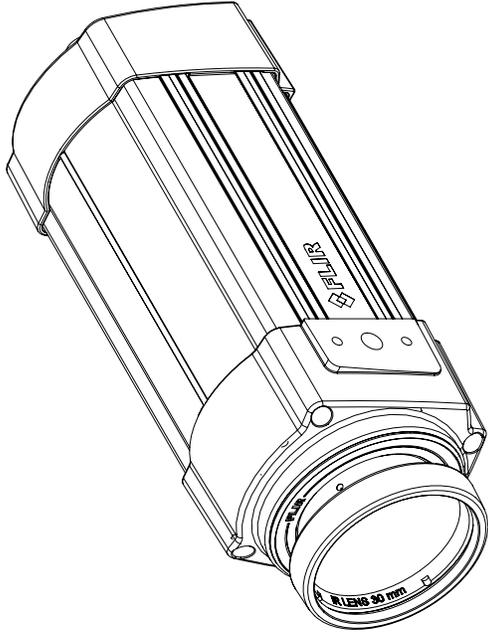






For additional dimensions see page 1

Model	2012-04-18	Check	CAHA	Drawn by	R&D Thermography	Rev	A3
Dimension						Scale	1:1
						Sheet	4(6)
						Drawing No.	T-125002
						Size	A




Basic dimensions FLIR A3xx/SC3xx

Camera with Lens IR f=76 mm (6°) incl support

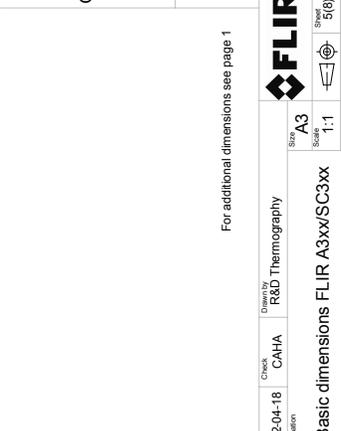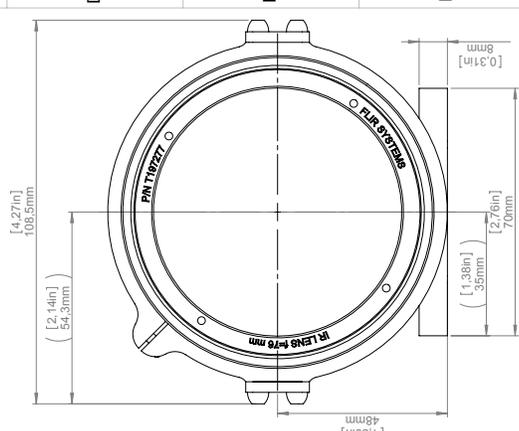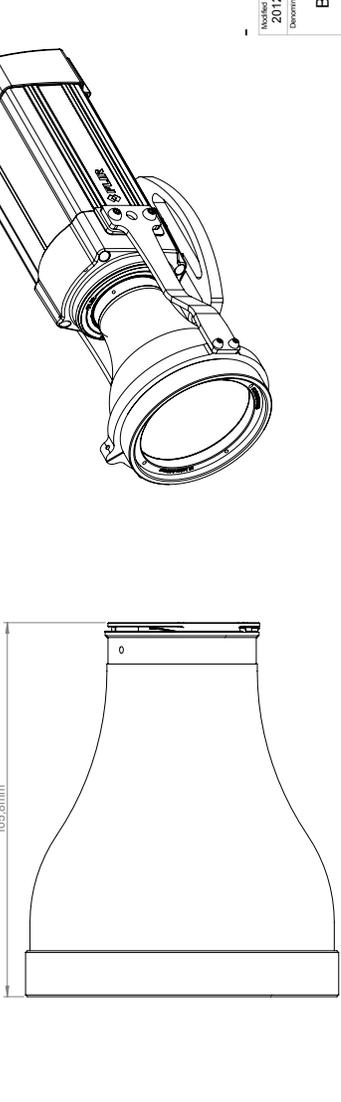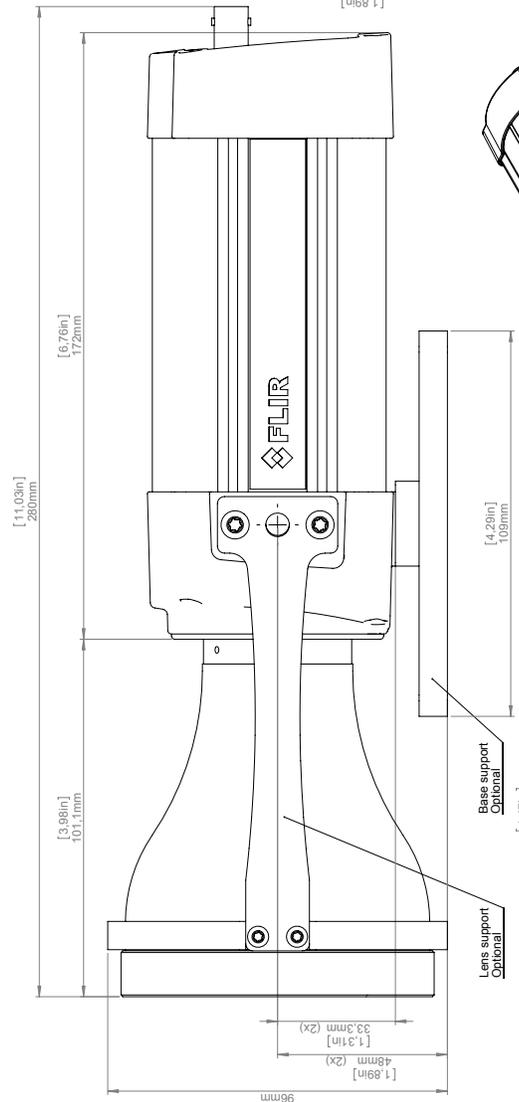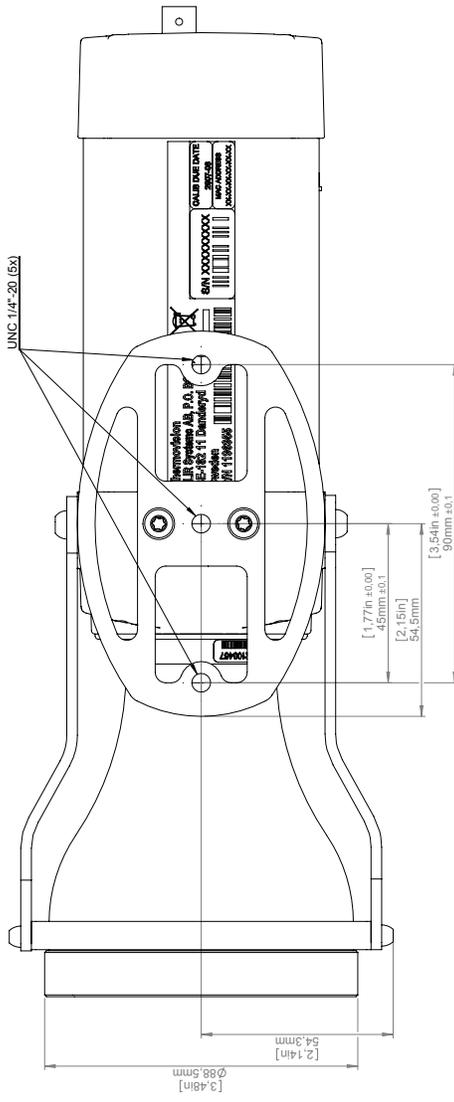







For additional dimensions see page 1

Model	2012-04-18	Check	CAHA	Drawn by	R&D Thermography	Rev	A3
Dimension						Scale	1:1
						Sheet	5(6)
						Drawing No.	T-125002
						Size	A




Basic dimensions FLIR A3xx/SC3xx

Camera with Close-up lens 2X (50 μm)

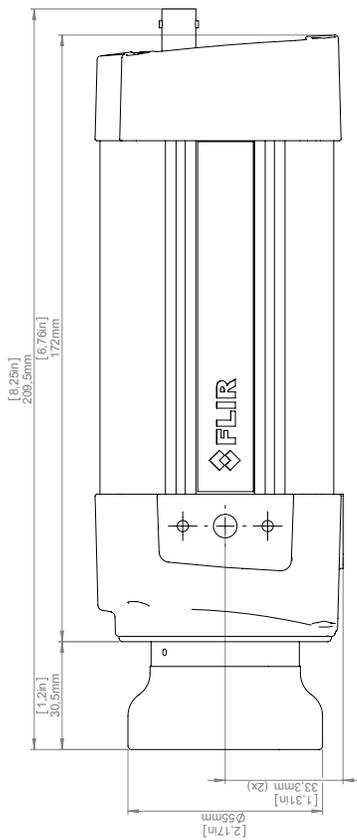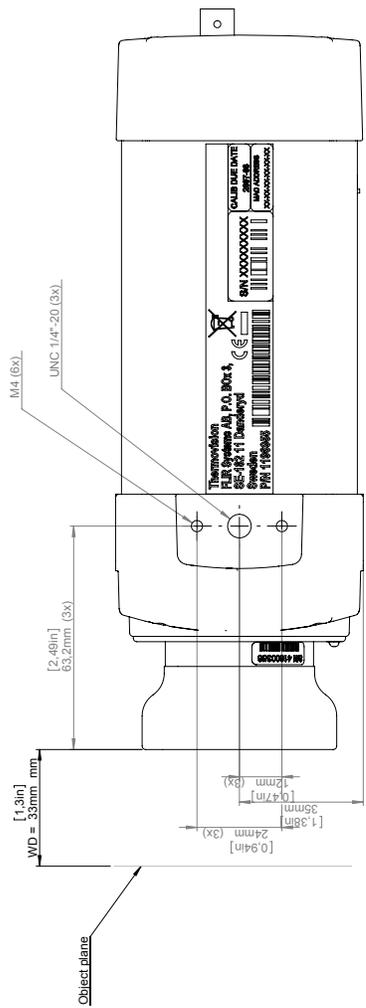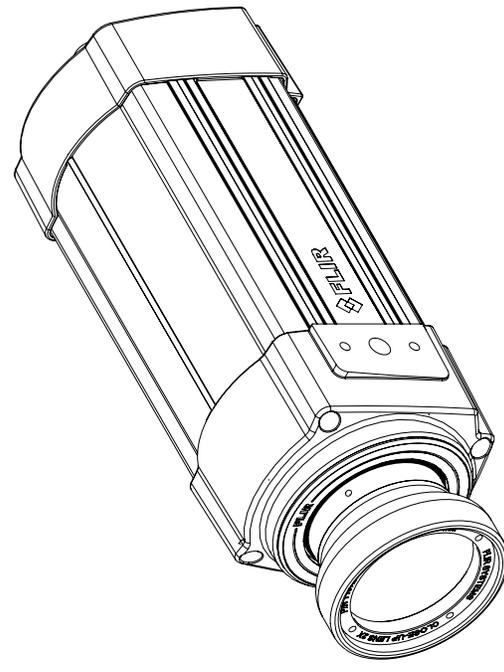

For additional dimensions see page 1

Modelled	2012-04-18	Checked	CAHA	Drawn by	R&D Thermography	Sheet	A3
Dimension						Scale	1:1
						Sheet	7(8)
						Drawing No.	T-125002
						Size	A



Basic dimensions FLIR A3xx/SC3xx



April 22, 2013

AQ320022

CE Declaration of Conformity

This is to certify that the System listed below have been designed and manufactured to meet the requirements, as applicable, of the following EU-Directives and corresponding harmonising standards. The systems consequently meet the requirements for the CE-mark.

Directives:

Directive 2004/108/EC; Electromagnetic Compatibility

Standards:

**Emission: EN 61000-6-4; Electro magnetic Compatibility
Generic standards - Emission**

**Immunity: EN 61000-6-2; Electro magnetic Compatibility;
Generic standards - Immunity**

System: **FLIR A310pt series**

FLIR Systems AB
Quality Assurance



Björn Svensson
Director